

ENVIRONMENTAL PRODUCT DECLARATION

as per ISO 14025 and EN 15804+A2

Owner of the Declaration	FAAC S.p.A. Soc. Unipersonale
Publisher	Institut Bauen und Umwelt e.V. (IBU)
Programme holder	Institut Bauen und Umwelt e.V. (IBU)
Declaration number	EPD-FAA-20250289-IBI1-EN
Issue date	25.08.2025
Valid to	24.08.2030

JS R and JS F - Removable and Fixed Bollards FAAC S.p.A. Soc. unipersonale

www.ibu-epd.com | <https://epd-online.com>



1. General Information

FAAC S.p.A. Soc. unipersonale

Programme holder

IBU – Institut Bauen und Umwelt e.V.
 Hegelplatz 1
 10117 Berlin
 Germany

Declaration number

EPD-FAA-20250289-IB11-EN

This declaration is based on the product category rules:

vehicle access control and vehicle security barrier systems ,
 01.11.2024
 (PCR checked and approved by the SVR)

Issue date

25.08.2025

Valid to

24.08.2030

Dipl.-Ing. Hans Peters
 (Chairman of Institut Bauen und Umwelt e.V.)

Florian Pronold
 (Managing Director Institut Bauen und Umwelt e.V.)

JS R and JS F - Removable and Fixed Bollards

Owner of the declaration

FAAC S.p.A. Soc. Unipersonale
 Via Calari 10
 40069 Bologna
 Italy

Declared product / declared unit

1 unit.

Scope:

The current environmental declaration outlines the LCA environmental results for the JS R and JS F bollard range, using the JS 80 R INOX model as the representative product, namely the heaviest and with the most complex finishes. The EPD covers the following products: JS 48 R, JS 80 R, JS 48 R INOX, JS 80 R INOX, JS 80 F, JS 80 F INOX. The EPD is a representative EPD.

The bollards are designed, assembled and tested by FAAC Spa at the Zola Predosa plant in Italy (Via Calari 10, 40069, Zola Predosa (BO)).

Primary data cover the year 2023.

The owner of the declaration shall be liable for the underlying information and evidence; the IBU shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

The EPD was created according to the specifications of EN 15804+A2. In the following, the standard will be simplified as *EN 15804*.

Verification

The standard EN 15804 serves as the core PCR	
Independent verification of the declaration and data according to ISO 14025:2011	
<input type="checkbox"/>	internally
<input checked="" type="checkbox"/>	externally

Dr.-Ing. Nikolay Minkov,
 (Independent verifier)

2. Product

2.1 Product description/Product definition

The FAAC JS 80 R INOX is a high-performance, removable security bollard, consisting of a steel underground base and a removable cylinder, allowing for temporary removal to provide access when needed, offering flexibility in securing and opening specific areas. The bollard extends 1,000 mm above ground with a diameter of 275 mm. The steel cylinder is protected against accidental impacts and damage from chemical and pollutant agents (e.g., fossil oils) by a replaceable mDure® polymer sleeve.

To protect the bollard from corrosion, the structure and cylinder undergo a cathodolysis treatment, all internal fastening systems are made of stainless steel, and the top of the cylinder is coated with Rilsan® anti-corrosion resin.

The bollard remains visible in all environmental conditions thanks to a reflective band and an LED light ring, which can be turned on at the customer's discretion.

The FAAC JS 80 R INOX bollard is certified to stop, in a single-unit configuration, vehicles weighing 7,500 kg traveling at a speed of 80 km/h, achieving the following performance ratings:
 -PAS 68:2013 Fixed Bollard V/7500 (N3)/80/90:9.7/27.9
 -IWA 14-1:2013 Fixed Bollard V/7200[N3C]/80/90:10.0
 -ASTM F2656/F2656M – 20: Test Method F2656/F2656M C750-P3

The JS 80 R INOX bollard was selected as the representative model for the JS R and JS F bollard range because it has the highest weight and the most extensive range of finishings. This choice also reflects the highest potential environmental impacts within the product family.

For the placing on the market in the European Union/European Free Trade Association (EU/EFTA) (with the exception of Switzerland) the following legal provisions apply:

- Directive no. 2006/42/EC ANNEX II 1B and the harmonised standards based on these provisions:
- EN ISO 12100:2010
- EN 60335-1:2012+A11:2014+A13:2017+A15:2021

The CE-marking takes into account the proof of conformity with the respective harmonized standards based on the legal provisions above. For the application and use the respective national provisions apply.

2.2 Application

The JS R and JS F bollards by FAAC are part of their high-security product range designed for perimeter protection and vehicle access control. These bollards are designed to provide safety and durability, with the capability to stop vehicles of significant mass and speed in security-critical locations.

2.3 Technical Data

Technical data are listed in the table below.

Technical data (specify system and properties)

Name	Value	Unit
Cylinder height from ground	1000	mm
Cylinder diameter	275	mm
Mass of total product system + packaging	456	kg
Mass of total product system without packaging	424	kg
Mass of bollard	326	kg
Mass of underground base	98	kg
Mass of packaging	32	kg

Performance data of the product according to the harmonised standards, based on provisions for harmonization.

Voluntary data: performance certified according to PAS 68; IWA 14-1 and ASTM F2656 standards.

- Able to withstand impact with a truck driven at 50 km/h (JS 48 R) or 80 km/h (JS 80 R/F)
- Breakthrough resistance: 673,000 J (JS 48 R) – 1,852,000 J (JS 80 R/F)

2.4 Delivery status

Each bollard is individually delivered on a wooden pallet and packaged in a cardboard box.

2.5 Base materials/Ancillary materials

Name	Value	Unit
Steel	97.8	%
Aluminium	0.4	%
Polyamide (PA)	<0.1	%
Polyurethane (PU)	1.6	%
Acrylonitrile butadiene styrene (ABS)	0.1	%
Polyester copolymer	<0.1	%
PA66 + glass fibre	<0.1	%
Cables	<0.1	%

This product/article/at least one partial article contains substances listed in the *candidate list* (date: 21.01.2025) exceeding 0.1 percentage by mass: no.


2.6 Manufacture

The bollards are manufactured in the FAAC plant situated in Via Monaldo Calari, 10, 40069 Zola Predosa BO (Italy).

Semi-finished products are sent from suppliers to the plant in Zola Predosa. Components are machined by subcontractors according to technical drawings developed by FAAC.

In the FAAC plant, the components are assembled. Lastly, the bollard is packed for shipping.

Below is a flowchart of the production/assembly process.

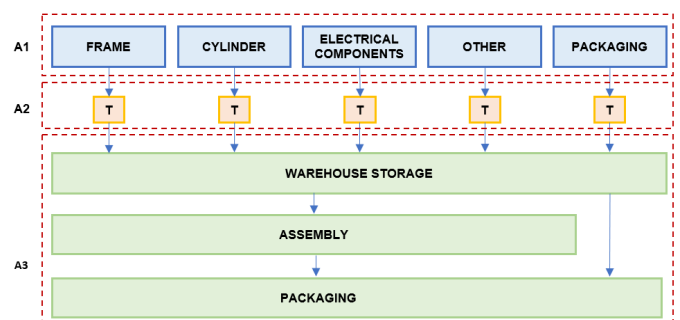

2.7 Environment and health during manufacturing

The FAAC plant in Zola Predosa is certified to the following ISO standards:

- ISO 14001: Environmental Management System
- ISO 9001: Quality Management System
- ISO 45001: Occupational Health and Safety Management System

2.8 Product processing/Installation

Information on the machinery and tools needed for installation as well as the safety measures are specified in the instruction manual provided by FAAC.

2.9 Packaging

The packaging consists of a wood pallet weighing 30 kg and cardboard weighing 1.67 kg. The end-of-life stage of the packaging was modelled assuming a scenario in which 50% of the material is incinerated with energy recovery and the remaining 50% is landfilled, in accordance with the 'end-of-waste' scenario outlined in Table G.4 of EN 50693:2019. Biogenic carbon balancing and the environmental impact of packaging disposal were included in module A3, as the installation phase falls outside the system boundaries. Waste codes according to European Waste Catalogue and Hazardous Waste List (EWC) - Valid from 1 January 2002.

- EWC 15 01 01 paper and cardboard packaging
- EWC 15 01 03 wooden packaging

2.10 Condition of use

No significant changes in material composition or environmentally relevant material properties are expected over the service life of the product. However, safety information related to transport, installation, use, maintenance, and end-of-life management is provided together with the product documentation.

2.11 Environment and health during use

The product does not release harmful substances or emissions into the environment.

2.12 Reference service life

Due to the lack of standards and guidelines on the reference service life of bollards, a reference service life of 20 years was chosen according to the standard considerations of the life of a building.

2.13 Extraordinary effects

Fire

Not applicable.

Water

In the event of floods or water related environmental disasters, to date the product does not contain substances that have an impact on water.

Mechanical destruction

No hazards are anticipated during mechanical destruction.

2.14 Re-use phase

Construction components and materials, including electronic parts, must not be disposed of with household waste. They should be taken to authorised collection and recycling centres.

2.15 Disposal

After having dismantled the product, disposal in compliance with the current waste disposal regulations is assumed to occur. In the model, in the absence of end-of-life data for the bollards, the recycling, incineration, and landfill rates suggested by the EN50693 standard were considered.

Waste codes according to *European Waste Catalogue* and Hazardous Waste List (EWC) - Valid from 1 January 2002:

- EWC 17 04 07 - mixed metals
- EWC 20 01 36 - discarded electrical and electronic equipment other than those mentioned in 20 01 21, 20 01 23 and 20 01 35
- EWC 17 04 11 - cables other than those mentioned in 17 04 10
- EWC 07 02 13 - waste plastic

2.16 Further information

Additional information on the product is available on FAAC's website <https://www.faac.it/prodotti/serie-js-dissuasori-disicurezza>.

3. LCA: Calculation rules

3.1 Declared Unit

The declaration refers to 1 FAAC JS 80 R INOX, inclusive of installation components.

Declared unit

Name	Value	Unit
Declared unit	1	pce.
Mass reference product system with packaging	456	kg/pce

3.2 System boundary

Cradle to gate with options, modules C1-C4, and module D (A1-A3 + C + D and additional modules. The additional modules are B1, B2, B3, B4, B5, B6, B7.

The following life cycle stages were considered:

Production stage:

- A1 – Raw material extraction and processing

- A2 – Transport to the manufacturer and
- A3 – Manufacturing

Use stage related to the operation of the building includes:

- B1 - Use
- B2 - Maintenance
- B3 - Repair
- B4 - Replacement
- B5 - Refurbishment
- B6 - Operational energy use
- B7 - Operational water use

End-of-life stage:

- C1 - Deinstallation
- C2 – Transport to waste processing
- C3 – Waste processing for recycling
- C4 – Disposal (landfill, waste for incineration)

This includes provision of all materials, products and energy, packaging processing and their transport, as well as waste processing up to the end-of-waste state or disposal of final

residues.

Module D:

- Declaration of benefits and loads

3.3 Estimates and assumptions

The following assumptions were made:

- phase C1 considers the handling of the bollard for 2 hours, modelled with the dataset Machine operation, diesel, < 18.64 kW, low load factor {GLO}| machine operation, diesel, < 18.64 kW, low load factor | Cut-off, U. In addition, road surface finishing is considered by including 8 hours working by an asphalt paver modelled with Machine operation, diesel, >= 74.57 kW, low load factor {GLO}| machine operation, diesel, >= 74.57 kW, low load factor | Cut-off, U;
- a distance of 1000 km was considered for the transport of the materials to the disposal/recovery/recycling site (C2);
- for the use phase a European scenario was considered;
- for the end-of-life percentages of the product the end of waste scenario described in Table G.4 of EN 50693:2019 was followed. Some materials are not included in Table G.4, therefore assumptions have been made. Below is a summary of the % rates used in the end of life for the different components/materials:

Material	Recycling Rate (%)	Energy recovery Rate (%)	Disposal rate, by incineration without energy recovery (%)	Disposal rate, by landfilling (%)
STEEL	80			20
ALUMINIUM	70			30
BRASS	70			30
CAST IRON	80			20
MOTOR+PUMP*				100
ZINC	60			40
POLYPROPYLENE	20	40		40
POLYAMIDE*			50	50
PC*			50	50
POLYURETHANE		50	-	50
PVC*			50	50
ABS	20	40	-	40
POM*			50	50
POLYESTER COPOLYMER*			50	50
PA66 GF*			50	50
HYDRAULIC OIL*	70		30	
ELECTRICAL MATERIAL	50			50
CABLE*	66		34	
SYNTHETIC RUBBER		50		50
MAGNET UNIT*	50			50
CAPACITOR*	50			50
ELECTRICAL CONNECTOR*	50			50
ELECTRICAL CONTACTOR*	50			50
ELECTRONIC BOARD*	50			50

3.4 Cut-off criteria

The cut-off include:

- the packaging of raw materials
- the end of life of packaging of raw materials

- the thermal energy, auxiliaries and waste produced at the Zola Predosa assembly plant since not specifically employed or generated by the production process of the bollards
- certain bollard's components, mainly small plastic and rubber parts

A sensitivity analysis was conducted to assess the impact of cut-off on the overall results. The findings revealed that the effect of cut-off on the total results was minimal, with an influence of less than 1.3%.

3.5 Background data

Specific data was used based on the production of 2023. For processes where the producer lacks influence or specific information, such as raw material extraction and end-of-life treatment, generic data from the following primary sources were considered:

- *Ecoinvent 3.10*

- *SimaPro 9.6.0.1*

The emission factor used for phase A3 is equal to 0,610 kgCO₂eq/kWh.

3.6 Data quality

The data quality can be described as good.

3.7 Period under review

Primary data cover a period of 12 months, from January 2023 to December 2023.

3.8 Geographic Representativeness

Land or region, in which the declared product system is manufactured, used or handled at the end of the product's lifespan: Europe

3.9 Allocation

An economic allocation method was applied in this assessment. This type of allocation was considered appropriate as inputs and outputs of manufacturing processes could not be clearly allocated based on physical parameters such as mass, pieces produced and surface area occupied.

3.10 Comparability

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to *EN 15804* and the building context, respectively the product-specific characteristics of performance, are taken into account. The LCA model is created using the Simapro 9.6.0.1 and Ecoinvent database v3.10. In order for two EPDs to be comparable, they must be based on the same PCR (including the same version) or on PCRs that are fully aligned. The products must also have identical functions, technical performances, and uses (e.g., same declared or functional unit); share equivalent system boundaries and data descriptions; follow consistent data quality requirements, data collection and allocation methods; use the same cut-off criteria and the same impact assessment method, including the version of the characterisation factors; and be valid at the time of comparison.

4. LCA: Scenarios and additional technical information

Characteristic product properties of biogenic carbon

Considering accompanying packaging, biogenic carbon content has been derived from the total mass of corrugated board box and wood.

Information on describing the biogenic carbon content at factory gate

Name	Value	Unit
Biogenic carbon content in product	-	kg C
Biogenic carbon content in accompanying packaging	14.14	kg C

Note: 1 kg of biogenic carbon is equivalent to 44/12 kg of CO₂.

Installation into the building (A5)

Name	Value	Unit
Wood	30.00	kg
Cardboard	1.67	kg

The packaging end of life disposal routes are 50% incineration with energy recovery and 50% landfill for both packaging materials as per the guidelines outlined in EN 50693.

Maintenance (B2)

Phase B2 includes the transport of the maintenance operator considered as 100 km every 5 years and modelled with the dataset Transport, freight, light commercial vehicle {RoW}| transport, freight, light commercial vehicle | Cut-off, U. The maintenance operations outlined in the FAAC product instruction manual, which were considered in the study, include integrity checks and inspections of the cylinder top ring, cylinder guide, reflective film, LED lights, and buzzer, with a frequency of every 5 years.

Name	Value	Unit
Maintenance cycle	5	Number/RSL

Since no inputs or outputs are associated with phases B1, B3, B5, and B7, the resulting environmental impacts for these phases are zero.

Reference service life

Name	Value	Unit
Life Span according to the manufacturer	20	a

End of life (C1-C4)

Name	Value	Unit
Collected separately waste type metals, plastics, electrical materials, oil	423.79	kg
Reuse	-	kg
Recycling	332.86	kg
Energy recovery	3.66	kg
Incineration	0.10	kg
Landfilling	87.17	kg

5. LCA: Results

In Table 1 "Description of the system boundary", all declared modules shall be indicated with an "X"; all modules that are not declared shall be indicated with "MND" (As default the modules B3, B4, B5 are marked as MNR – module not relevant). In the following tables, columns can be deleted for modules that are not declared. Indicator values should be declared with three valid digits (eventually using the exponential form (e.g. 1,23E-5 = 0,0000123). A uniform format should be used for all values of one indicator.

If several modules are not declared and therefore have been deleted from the table, the abbreviations for the indicators can be replaced by the complete names, while the readability and clear arrangement should be maintained; the legends can then be deleted. If due to relevant data gaps, an indicator cannot be declared in a robust way, then the abbreviation "IND" (indicator not declared) should be used for this indicator.

- 0 - calculated value is 0
- 0 - value falls under the cut-off
- 0 - assumption which exclude any flows (e.g. exported electricity A1-A3)
- IND – in cases where the inventory does not support the methodological approach or the calculation of the specific indicator IND shall be used.

If no reference service life is declared (see chapter 2.13 "Reference Service Life"), the LCA results of the modules B1-B2 and B6-B7 shall refer to a period of one year. This shall then be indicated as an explanatory text below the tables. In addition, the formula for the quantification of such B-modules over the total life cycle shall be provided.

DESCRIPTION OF THE SYSTEM BOUNDARY (X = INCLUDED IN LCA; MND = MODULE OR INDICATOR NOT DECLARED; MNR = MODULE NOT RELEVANT)

Product stage			Construction process stage		Use stage							End of life stage				Benefits and loads beyond the system boundaries
Raw material supply	Transport	Manufacturing	Transport from the gate to the site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	MND	MND	X	X	X	X	X	X	X	X	X	X	X	X

RESULTS OF THE LCA - ENVIRONMENTAL IMPACT according to EN 15804+A2: 1 Unit JS 80 R INOX

Parameter	Unit	A1	A2	A3	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-total	kg CO ₂ eq	1.41E+03	6.11E+00	9.22E+00	0	8.47E-01	0	0	0	0	0	2.14E+02	6.62E+01	1.85E+01	1.15E+00	-5.41E+02
GWP-fossil	kg CO ₂ eq	1.4E+03	6.1E+00	9.17E+00	0	8.46E-01	0	0	0	0	0	2.14E+02	6.62E+01	1.86E+01	1.15E+00	-5.42E+02
GWP-biogenic	kg CO ₂ eq	1.47E+01	3.7E-03	0	0	4.94E-04	0	0	0	0	0	2.32E-02	3.89E-03	-9.2E-02	5.62E-04	1.9E+00
GWP-luluc	kg CO ₂ eq	1.08E+00	2.07E-03	5.17E-02	0	4.11E-04	0	0	0	0	0	1.84E-02	2.7E-02	1.24E-02	3.28E-04	-1.12E-01
ODP	kg CFC11 eq	1.19E-05	1.23E-07	2.31E-07	0	1.26E-08	0	0	0	0	0	3.25E-06	9.63E-07	1.29E-07	1.65E-08	-1.61E-06
AP	mol H ⁺ eq	6.14E+00	2.74E-02	4.89E-02	0	3.97E-03	0	0	0	0	0	6.13E-01	3.01E-01	1.04E-01	4.27E-03	-2.3E+00
EP-freshwater	kg P eq	5.79E-01	4.19E-04	3.5E-03	0	1.13E-04	0	0	0	0	0	6.2E-03	5.31E-03	5.01E-03	5.56E-05	-2E-01
EP-marine	kg N eq	1.31E+00	1.08E-02	1.6E-02	0	1.28E-03	0	0	0	0	0	2.37E-01	1.13E-01	2.85E-02	7.42E-02	-5.27E-01
EP-terrestrial	mol N eq	1.33E+01	1.17E-01	1.67E-01	0	1.41E-02	0	0	0	0	0	2.59E+00	1.23E+00	2.93E-01	1.77E-02	-5.45E+00
POCP	kg NMVOC eq	4.69E+00	4.21E-02	6.85E-02	0	5.41E-03	0	0	0	0	0	1.02E+00	4.24E-01	8.54E-02	6.21E-03	-1.84E+00
ADPE	kg Sb eq	1.17E-02	1.89E-05	5.05E-05	0	6.66E-06	0	0	0	0	0	7.57E-05	2.07E-04	5.35E-04	9.72E-07	-4.41E-03
ADPF	MJ	1.63E+04	8.72E+01	1.55E+02	0	1.16E+01	0	0	0	0	0	2.77E+03	9.42E+02	1.23E+02	1.41E+01	-4.9E+03
WDP	m ³ world eq deprived	4.55E+02	3.81E-01	4.66E+00	0	6.55E-02	0	0	0	0	0	6.01E+00	4.5E+00	1.88E+00	-1.16E-01	-4.12E+01

GWP = Global warming potential; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential of land and water; EP = Eutrophication potential; POCP = Formation potential of tropospheric ozone photochemical oxidants; ADPE = Abiotic depletion potential for non-fossil resources; ADPF = Abiotic depletion potential for fossil resources; WDP = Water (user) deprivation potential)

RESULTS OF THE LCA - INDICATORS TO DESCRIBE RESOURCE USE according to EN 15804+A2: 1 Unit JS 80 R INOX

Parameter	Unit	A1	A2	A3	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PERE	MJ	1.63E+03	1.46E+00	6.28E+02	0	2.94E-01	0	0	0	0	0	1.65E+01	1.23E+01	1.76E+01	1.53E-01	-2.34E+02
PERM	MJ	0	0	4.23E+02	0	0	0	0	0	0	0	0	0	0	0	0

PERT	MJ	1.63E+03	1.46E+00	1.05E+03	0	2.94E-01	0	0	0	0	0	1.65E+01	1.23E+01	1.76E+01	1.53E-01	-2.34E+02
PENRE	MJ	1.63E+04	8.72E+01	1.55E+02	0	1.16E+01	0	0	0	0	0	2.77E+03	9.42E+02	1.23E+02	1.41E+01	-4.9E+03
PENRM	MJ	1.99E+02	0	0	0	0	0	0	0	0	0	0	0	0	0	0
PENRT	MJ	1.65E+04	8.72E+01	1.55E+02	0	1.16E+01	0	0	0	0	0	2.77E+03	9.42E+02	1.23E+02	1.41E+01	-4.9E+03
SM	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
FW	m ³	1.49E+01	1.26E-02	1.45E-01	0	2.11E-03	0	0	0	0	0	1.98E-01	1.33E-01	7.16E-02	-2.21E-03	-1.97E+00

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

RESULTS OF THE LCA – WASTE CATEGORIES AND OUTPUT FLOWS according to EN 15804+A2:

1 Unit JS 80 R INOX

Parameter	Unit	A1	A2	A3	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
HWD	kg	2.5E+00	2.27E-03	2.58E-02	0	6.96E-04	0	0	0	0	0	2.53E-02	2.49E-02	9.57E-02	4.91E-03	-1.18E-01
NHWD	kg	1.24E+02	5.38E+00	2.33E+00	0	3.37E-01	0	0	0	0	0	1.7E+00	5.74E+01	3.36E+02	8.72E+01	-5.15E+01
RWD	kg	2.57E-02	2.87E-05	2.49E-04	0	5.25E-06	0	0	0	0	0	3.05E-04	2E-04	2.26E-04	2.73E-06	6.07E-03
CRU	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
MFR	kg	0	0	0	0	0	0	0	0	0	0	0	0	3.33E+02	0	0
MER	kg	0	0	0	0	0	0	0	0	0	0	0	0	3.66E+00	0	0
EEE	MJ	0	0	0	0	0	0	0	0	0	0	0	0	1.44E+01	4.03E-01	0
EET	MJ	0	0	0	0	0	0	0	0	0	0	0	0	2.82E+01	7.89E-01	0

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy

RESULTS OF THE LCA – additional impact categories according to EN 15804+A2-optional:

1 Unit JS 80 R INOX

Parameter	Unit	A1	A2	A3	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PM	Disease incidence	1.2E-04	5.92E-07	8.3E-07	0	8.37E-08	0	0	0	0	0	1.45E-05	6.35E-06	1.36E-06	9.32E-08	-4.71E-05
IR	kBq U235 eq	1.01E+02	1.16E-01	9.62E-01	0	2.1E-02	0	0	0	0	0	1.24E+00	8.15E-01	8.85E-01	1.12E-02	2.31E+01
ETP-fw	CTUe	3.93E+04	2.27E+01	8.63E+01	0	3.11E+00	0	0	0	0	0	3.93E+02	2.47E+02	1.08E+02	1.11E+02	-2.25E+04
HTP-c	CTUh	1.1E-04	4.12E-08	1.7E-07	0	4.78E-09	0	0	0	0	0	9.38E-07	3.42E-07	7.88E-08	2.76E-09	-6.95E-05
HTP-nc	CTUh	2.4E-05	6.06E-08	1.11E-07	0	7.21E-09	0	0	0	0	0	4.93E-07	6.46E-07	4.93E-07	1.41E-08	-1.09E-05
SQP	SQP	5.15E+03	6.53E+01	3.98E+03	0	4.77E+00	0	0	0	0	0	1.95E+02	7.04E+02	2.1E+02	2.76E+01	-1.72E+03

PM = Potential incidence of disease due to PM emissions; IR = Potential Human exposure efficiency relative to U235; ETP-fw = Potential comparative Toxic Unit for ecosystems; HTP-c = Potential comparative Toxic Unit for humans (cancerogenic); HTP-nc = Potential comparative Toxic Unit for humans (not cancerogenic); SQP = Potential soil quality index

Disclaimer 1 – for the indicator IRP.

This impact category deals mainly with the eventual impact of low-dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure or radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, radon and from some construction materials is also not measured by this indicator.

Disclaimer 2 – for the indicators ADPE, ADPF, WDP, ETP-fw, HTP-c, HTP-nc, SQP

The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high as there is limited experience with the indicator.


6. LCA: Interpretation

This chapter presents an interpretation of the Life Cycle Impact Assessment categories. When expressed as a percentage, the impact indicates its proportion of the total product impact across all modules, excluding module D.

The results for the JS 80 R INOX bollard show that the manufacturing stage is responsible for the majority of the environmental impacts, with an average contribution of 83.5% (ranging from 73.7% to 97.9%). The end-of-life stage is the second-largest contributor, averaging 16.1% (with values ranging from 2.6% to 26.2%). The remaining life cycle stages, specifically installation and use, contribute minimally, with

average impacts of 0.3% and 0.1%, respectively.

The average impact was calculated by considering GWP total and other environmental indicators, excluding GWP-fossil, biogenic and LULUC.

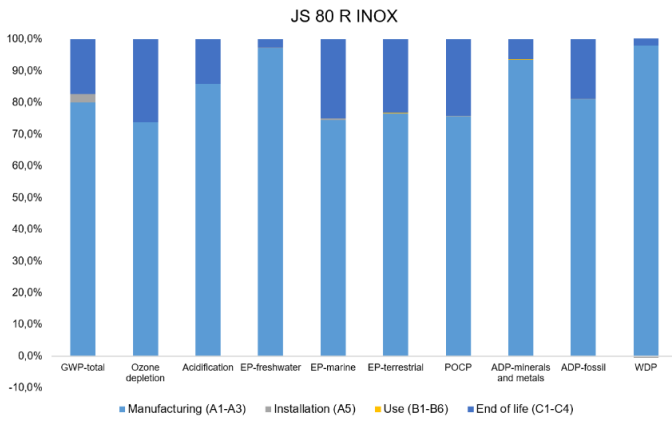

Resource use indicators	UM	JS 48 R	JS 80 R	JS 48 R INOX	JS 80 F	JS 80 F INOX
PERE	MJ (LHV)	-18,4%	-7,0%	-11,4%	-27,5%	-20,6%
PERM	MJ (LHV)	0,0%	0,0%	0,0%	0,0%	0,0%
PERT	MJ (LHV)	-15,6%	-5,9%	-9,7%	-23,3%	-17,4%
PENRE	MJ (LHV)	-23,7%	-4,1%	-19,7%	-28,5%	-24,5%
PENRM	MJ (LHV)	12,7%	12,7%	0,0%	12,7%	0,0%
PENRT	MJ (LHV)	-23,4%	-3,9%	-19,5%	-28,1%	-24,2%
Use of secondary material	kg	0,00%	0,00%	0,00%	0,00%	0,00%
Use of renewable secondary fuels	MJ (LHV)	0,00%	0,00%	0,00%	0,00%	0,00%
Use of non-renewable secondary fuels	MJ (LHV)	0,00%	0,00%	0,00%	0,00%	0,00%
Net use of fresh water	m3	-28,5%	-4,2%	-24,3%	-33,7%	-29,6%
Hazardous waste disposed	kg	-11,3%	-7,3%	-4,0%	-12,0%	-4,6%
Non-hazardous waste disposed	kg	-32,6%	-2,8%	-29,8%	-36,5%	-33,7%
Radioactive waste disposed	kg	-23,1%	-5,9%	-17,2%	-28,1%	-22,2%
Components for re-use	kg	0,00%	0,00%	0,00%	0,00%	0,00%
Materials for recycling	kg	-34,4%	-2,4%	-32,1%	-37,8%	-35,4%
Materials for energy recovery	kg	11,2%	11,2%	0,0%	11,2%	0,0%
Exported energy - electricity	MJ	10,9%	10,9%	0,0%	10,9%	0,0%
Exported energy - heat	MJ	10,9%	10,9%	0,0%	10,9%	0,0%
Recovered energy	MJ	10,9%	10,9%	0,0%	10,9%	0,0%
Biogenic carbon content - product	kg C	0,0%	0,0%	0,0%	0,0%	0,0%
Biogenic carbon content - packaging	kg C	0,0%	0,0%	0,0%	0,0%	0,0%

The variations in environmental impacts within the JS R product range have been evaluated and are shown in the following table.

Impact Category	UM	JS 48 R	JS 80 R	JS 48 R INOX	JS 80 F	JS 80 F INOX
Climate change - Total	kg CO2 eq	-25,0%	-4,1%	-20,9%	-30,1%	-26,0%
Climate change - Fossil	kg CO2 eq	-25,1%	-4,0%	-21,1%	-30,2%	-26,2%
Climate change - Biogenic	kg CO2 eq	-13,8%	-11,8%	-2,0%	-18,1%	-6,3%
Climate change - Land use and LU change	kg CO2 eq	-21,6%	-4,8%	-16,8%	-27,5%	-22,7%
Ozone depletion	kg CFC11 eq	-19,3%	-3,9%	-15,3%	-23,2%	-19,3%
Acidification	mol H+ eq	-24,9%	-4,9%	-20,1%	-31,6%	-26,7%
Eutrophication, freshwater	kg P eq	-27,6%	-4,0%	-23,6%	-32,1%	-28,2%
Eutrophication, marine	kg N eq	-22,9%	-3,4%	-19,6%	-28,0%	-24,6%
Eutrophication, terrestrial	mol N eq	-24,4%	-4,0%	-20,4%	-29,9%	-25,9%
Photochemical ozone formation	kg NMVOC eq	-24,1%	-3,7%	-20,4%	-28,9%	-25,3%
Resource use, minerals and metals	kg Sb eq	-19,8%	-10,7%	-9,0%	-36,3%	-25,5%
Resource use, fossils	MJ	-23,7%	-4,1%	-19,7%	-28,5%	-24,5%
Water use	m3 depriv.	-29,1%	-3,8%	-25,4%	-34,2%	-30,4%
Additional impact categories	UM	JS 48 R	JS 80 R	JS 48 R INOX	JS 80 F	JS 80 F INOX
Particulate matter	disease inc.	-28,5%	-3,6%	-24,9%	-33,5%	-29,9%
Ionising radiation	kBq U-235 eq	-23,2%	-5,9%	-17,2%	-28,2%	-22,3%
Ecotoxicity, freshwater - part 1	CTUe	-31,3%	-1,8%	-29,5%	-33,3%	-31,5%
Ecotoxicity, freshwater - part 2	CTUe	-15,5%	-2,4%	-13,2%	-18,1%	-15,7%
Ecotoxicity, freshwater - inorganics	CTUe	-27,9%	-2,4%	-25,6%	-30,6%	-28,2%
Ecotoxicity, freshwater - organics - p.1	CTUe	-32,4%	-1,7%	-30,7%	-34,2%	-32,5%
Ecotoxicity, freshwater - organics - p.2	CTUe	-6,1%	-0,5%	-5,6%	-6,6%	-6,1%
Human toxicity, cancer	CTUh	-32,5%	-1,7%	-30,8%	-34,3%	-32,6%
Human toxicity, non-cancer	CTUh	-26,3%	-4,7%	-21,6%	-32,8%	-28,1%
Land use	Pt	-16,2%	-3,7%	-12,5%	-20,6%	-16,9%

7. Requisite evidence

8. References

ASTM F2656/F2656M-20

Standard Test Method for Crash Testing of Vehicle Security Barriers.

EN 15804

EN 15804:2012+A2:2019+AC:2021, Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products.

EN 16449

EN 16449:2014 Wood and wood-based products - Calculation of the biogenic carbon content of wood and conversion to carbon dioxide.

EN 50693

EN 50693:2019 - Product category rules for life cycle assessments of electronic and electrical products and systems.

EN 60335

EN 60335-1, -2-103:2020-08, Household and similar electrical appliances - Safety - Part 1: General requirements.

European Commission

European Commission. Product Environmental Footprint Category Rules Guidance 6.3. European Commission, 2018.

European Waste Catalogue and Hazardous Waste List

EWG codes according to Commission Decision 2000/532/EC, valid from 1 January 2002.

Institut Bauen und Umwelt

Institut Bauen und Umwelt e.V.: General Instructions for the EPD programme of Institut Bauen und Umwelt e.V., Version 2.0, Berlin: Institut Bauen und Umwelt e.V., 2021.

ISO 12100:2010

Safety of machinery — General principles for design — Risk assessment and risk reduction.

ISO 14001:2015

Environmental management systems — Requirements with guidance for use.

ISO 9001:2015

Quality management systems — Requirements.

ISO 45001:2018

Occupational health and safety management systems — Requirements with guidance for use.

ISO 14025

EN ISO 14025:2011, Environmental labels and declarations — Type III environmental declarations — Principles and procedures.

ISO 14040

ISO 14040:2006/Amd 1:2020 Environmental management - Life cycle assessment - Principles and framework.

ISO 14044

ISO 14044:2006/Amd 2:2017 Environmental management - Life cycle assessment – Requirements and guidelines.

IWA 14–1:2013

Vehicle security barriers
Part 1: Performance requirement, vehicle impact test method and performance rating.

Machinery Directive

Directive 2006/42/EC of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

PAS 68:2013

Impact test specifications for vehicle security barrier systems. www.ibu-epd.com

PCR Part A+A2, version 1.4

Institut Bauen und Umwelt e.V., Berlin (pub.): Product Category Rules for Construction Products from the range of Environmental Product Declarations of Institut Bauen und Umwelt (IBU), Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Project Report according to EN 15804+A2:2019. April 2024 (www.bau-umwelt.de)

PCR Part B

Product Category Rules for Construction Products from the range of Environmental Product Declarations of Institut Bauen und Umwelt (IBU), PCR Part B: Requirements on the EPD for vehicle access control and vehicle security barrier systems.

SimaPro

SimaPro software-system version 9.6.0.1 (PRé consultants) and Ecoinvent 3.10 database, 2024.

2011/65/EU ROHS Directive

Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

The literature referred to in the Environmental Product Declaration must be listed in full. Standards already fully quoted in the EPD do not need to be listed here again.
The current version of PCR Part A and PCR Part B of the PCR document on which they are based must be referenced.

**Publisher**

Institut Bauen und Umwelt e.V.
Hegelplatz 1
10117 Berlin
Germany

+49 (0)30 3087748- 0
info@ibu-epd.com
www.ibu-epd.com

**Programme holder**

Institut Bauen und Umwelt e.V.
Hegelplatz 1
10117 Berlin
Germany

+49 (0)30 3087748- 0
info@ibu-epd.com
www.ibu-epd.com

**Author of the Life Cycle Assessment**

TÜV Italia srl
Viale Fulvio Testi 280/6
20126 Milan
Italy

02.241301
sustainability.we@tuvsud.com
<https://www.tuvsud.com/it-it>

**Owner of the Declaration**

FAAC S.p.A. Soc. Unipersonale
Via Calari 10
40069 Bologna
Italy

+39 051 09 57 906
sandrapaola.ricci@faactechnologies.com
<https://faactechnologies.com/>